


1459.02

PROFISTAR HOEING FRAME
FOUR-ROW MODEL

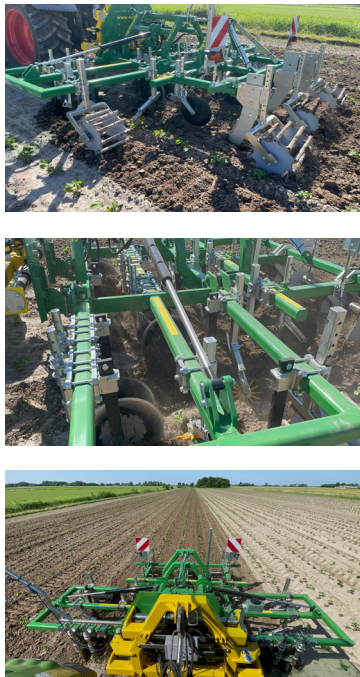

The Metasa hoeing frame from the ProfiStar series is designed specifically for mechanical weed control within and between crop rows. It can be combined with other implements from the ProfiStar series, such as the three-row inter-row cultivator. The implement mounts are designed to CAT 2/3 standards. The robust tubular frame construction is fitted with StVZO-compliant warning signs and ensures safe and stable operation. Six hardened disc blades (Ø460 mm) with anti-twist protection are height-adjustable and run true to the track at the edge of the crop. Straw-covered aisles are effectively worked by nine staggered swallowtail coulters without pushing the straw aside. All tools can be positioned continuously along each beam. An integrated scale facilitates precise adjustment. The hoeing frame is available in two-row, three-row and four-row versions.

ARTICLE-NUMBER 1459.02

Weight*: ca. 1750 kg
Dim.*: 4332 x 1465 x 1443 mm (B x T x H)

SUITABLE FOR
THE FOLLOWING CROPS

- Strawberries
- Vegetables
- Silphie

METASA
METALLKONSTRUKTIONEN UND ERNTETECHNIK GMBH

Haldenstraße 14
45966 Gladbeck
Germany

T +49 2043 378363-0
info@metasa.de
www.metasa.de

- + SUITABLE FOR GROUND AND RAISED-BED CULTIVATION
- + KAT2/3 SELECTED FOR RECORDING
- + LARGE 460 MM DISC HARROW
- + SUITABLE FOR FRONT AND REAR MOUNTING
- + NO ADDITIVES IN THE STRAW BEDDING
- + OPTION TO ATTACH TO COMBINATIONS
- +HEAVY CULTIVATOR HANDLE WITH GOOSEFOOT COULTERS
- + TOOLS WITH INFINITELY VARIABLE ADJUSTMENT

ART.-NR.	ADDITIONAL ARTICLE
1440	Sliding frame
1450	ProfiStar 3-row
1459.01	3-row bending beam
1459.04	2-row bending beam
1459.06	Corrugated sheet frame
1459.20	finger hoe

*Bei angegebenen Daten, Gewichten und Maßen sind produktionsbedingte Toleranzen möglich. Aus diesen Informationen können keine rechtlich verbindlichen Zusicherungen bestimmter Eigenschaften abgeleitet werden. Irrtümer und Änderungen vorbehalten.